

SINGLE PHASE STRING INVERTER

7000W | 8000W | 9000W

KEY FEATURES



Enhance Solar System Output

Support high current PV modules with 12.5A operation current.



Max. Efficiency 98.1%

H6 Plus high efficient topology with Max. efficiency 98.1%, Europe 97.5%.



User Friendly

Light weight allows one person installation.
Real-time monitoring with Cloud platform.
Support one-click inverter configuration.
Support remote parameter configuration & firmware update.




Higher Reliability

Integrated power module design.
Integrated DC Box.
Natural convection.
IP65.



standard warranty, extension up to 10 years

CSI-9K-S22002-ED EFFICIENCY CURVE

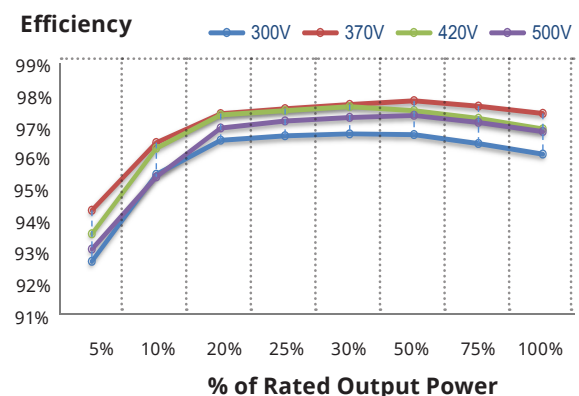

CSI SOLAR CO., LTD. is committed to providing high quality solar products, solar system solutions and services to customers around the world. CSI Solar was recognized as the No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey, and is a leading PV project developer and manufacturer of solar modules, with over 46 GW deployed around the world since 2001.

SYSTEM TECHNICAL DATA

MODEL NAME	CSI-7K-S22002-ED	CSI-8K-S22002-ED	CSI-9K-S22002-ED
DC INPUT			
Max. DC Input Voltage (V)	600	600	600
Start-up DC Input Voltage (V)	120	120	120
MPPT Operating Voltage Range (V)	100 - 500	100 - 500	100 - 500
Rated Input Voltage (V)	360	360	360
Max. Input Current (A)	12.5 / 25	12.5 / 25	12.5 / 25
Max. Short-Circuit Current (A)	15 / 30	15 / 30	15 / 30
Number of MPP Trackers	2	2	2
Number of DC Inputs	1 / 2	1 / 2	1 / 2
AC OUTPUT			
Rated Output Power (W)	7000	8000	9000
Max. Output Power (W)	7700	8000	9000
AC Grid Connection Type	L / N / PE		
AC Nominal Voltage And Range (V)	220 / 230 / 240 (180 ~ 280)		
AC Nominal Frequency And Range (Hz)	50 / 60 (± 5)		
Max. Output Current (A)	35	36.4	40.9
Power Factor (@Rated Output Power)	> 0.99		
Displacement Power Factor	0.8 leading to 0.8 lagging		
Total Harmonic Distortion (THDi)	< 3 %		
EFFICIENCY			
Max. Efficiency	98.1 %	98.1 %	98.1 %
European Efficiency	97.5 %	97.5 %	97.5 %
MPPT Efficiency	99.9 %	99.9 %	99.9 %
SAFETY & PROTECTION			
DC SPD	Type II		
DC Switch	Integrated		
Anti-Islanding Protection	Integrated		
DC Reverse-Polarity Protection	Integrated		
Insulation Monitoring	Integrated		
AC Over Voltage Protection	Integrated		
AC Over Current Protection	Integrated		
AC Short-Circuit Protection	Integrated		
Residual Current Protection	Integrated		
Overvoltage Class	II (DC), III (AC)		
GENERAL PARAMETERS			
Dimensions (W*H*D, mm)	399 * 583 * 192		
Net Weight (kg)	19.3		
Installation Method	Wall - mounted		
DC Connection Type	MC4		
AC Connection Type	Connector		
Communication Interfaces	M16 (RS485 / WiFi)		
Display	LED Indicator		
Cooling	Natural Convection		
Protection Degree	IP65		
Operating Ambient Temperature Range (°C)	- 25 ~ 60 °C (> 45 °C, derating operation)		
Relative Humidity (Non-Condensing)	0 % ~ 100 %		
Max. Operating Altitude (m)	4000 m (> 3000 m, derating operation)		
Acoustic Noise Emission Level (dBA)	< 25		
Topology	Transformerless		
Night Power Consumption (W)	< 1		
Safety and EMC	IEC 62109-1/2, IEC 61000-6-1, IEC 61000-6-3		
Grid Connection Standard	ABNT NBR 16149/16150:2013, IEC61727, IEC62116		

*Any system which DC/AC ratio is less than 1.5 is within product limited warranty, otherwise, please contact CSI local technical team for further confirmation.

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, CSI SOLAR CO., LTD. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

CSI SOLAR CO., LTD.

199 Lushan Road, SND, Suzhou, Jiangsu, China, www.csisolar.com

June 2021, All rights reserved. PV Inverter Product Datasheet V1.2_EN